


CATV Internet Customer Installation Guide with WIFI Router





Arris CATV Modem

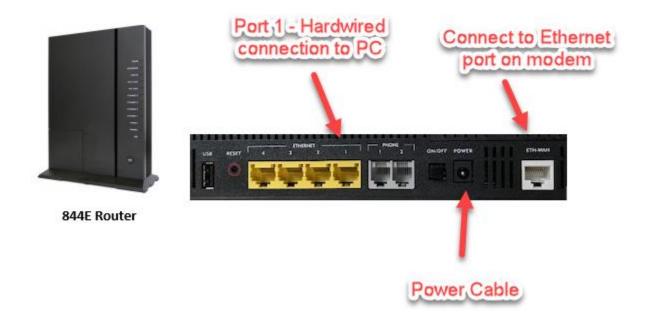

- 1. Connect the Arris Modem to a power outlet
- 2. Connect the Arris Modem Coax port to a Coax wall Jack
- 3. Wait for Online light to become solid, this could take up to 60 seconds
- 4. Connect Ethernet cable from Arris Modem Ethernet port to 844E Router Eth-Wan port
- 5. Connect 844E to a power outlet
- 6. Wait approximately 60 seconds for the router to boot up
- 7. You can also connect a PC to Ethernet port 1 on the 844E for internet access

SSID 2.4Ghz	Password	
SSID 5Ghz	Password	

WIFI Router Placement Tips:

- Place the 844E router in a high, centralized location
- Pick a place that has good air circulation away from electronics
- Try to avoid placing the 844E router near the following:
 - Cordless phones
 - Microwaves
 - Computer monitors
 - Wireless video cameras
 - Windows
 - Bluetooth devices
 - Reflective surfaces
 - Reinforced concrete
 - Metal partitions, fixtures
 - Sprinklers, and pipes